

L1 Round Flood 35WATTS
-LRF35



SPECIFICATIONS

PHYSICAL

| | |
|------------------------------|--------|
| Length | 169mm |
| Height | 185mm |
| Depth(Including cable gland) | 55mm |
| Weight | 2.5Kgs |

CONSTRUCTION

| | |
|-------------------|--------------------------------|
| Color | Powder coated black |
| Housing | Machined aluminum |
| Light front glass | Clear polycarbonate, LEXAN 8mm |
| Protection rating | IP66 |

LIGHT SOURCE

| | |
|-------|--|
| LED | 5pcs of RGBW IN ONE LEDS |
| Color | RGBW(COOL WHITE) additive color changing |

CONTROL


| | |
|------------------------|-------------------------------------|
| DMX channels | 4 for R, G, B and W |
| Setting and addressing | Onboard DMX addressing dip switches |
| Protocol | DMX512 |

CONNECTIONS

| | |
|----------------|---|
| Power and Data | 2m of 4 conductor urethane black cable, |
|----------------|---|

ELECTRICAL

| | |
|-------------------------|--|
| Rated input voltage | 24VDC |
| Rated power consumption | 35Watts and 1.43A at RGBW full intensity |

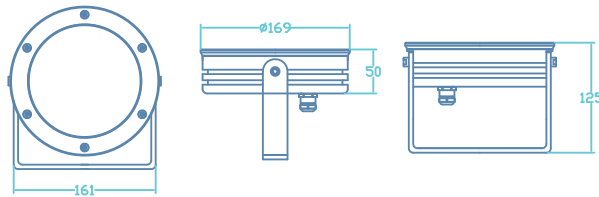

TYPICAL WIRING DIAGRAM

